

→ 简介

/

()

→ 技术参数

防爆等级: [Ex ia Ga] IIC

供电电源:

(14+ 15-)


18V DC ~ 60V DC (24V DC)

输入信号类型 (1 2 3):

允许引线电阻: ≤ 20 Ω/

输出信号类型 (7 8 9 10 11 ¹)

C

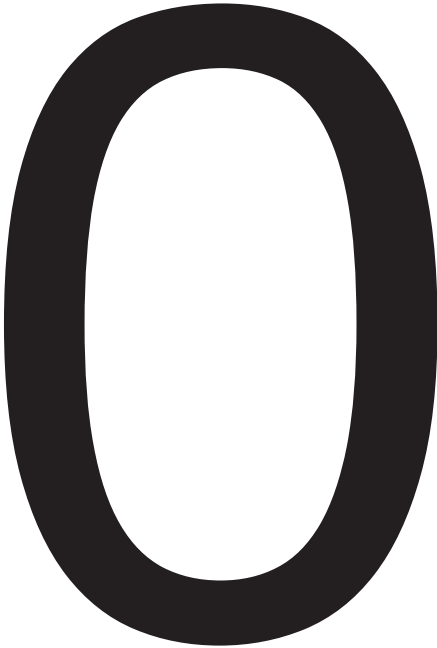

Nanjing New Power Electric Technology Co., Ltd.

		/
IEC 60584-1	K	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	E	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	J	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	T	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	N	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	S	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	R	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	B	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	W5Re-W26Re	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
ASTM E988-96	W3Re-W25Re	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
GOST R8.585	L	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
IEC 60751	Pt100 (α=0.00385)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Pt100 (α=0.00391)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu50 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu100 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu50 (α=0.00426)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu100 (α=0.00426)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
GOST 6651	Pt100 (α=0.00385)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Pt100 (α=0.00391)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu50 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu100 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu50 (α=0.00426)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.

→ BUS规格

BUS	
	Max . 8A
(UL/IEC)	1.6kV
	-40°C~-+105°C

➔ 安装

- ☐ DIN IEC 60715 35mm

C.

D.

→ 面板显示

- ☐ **PWR:** ()
☐ **ALM:** ()
 LED LED RTD: ()
) LED TC: LED

→ 编程及校准

- ○ ○ ○

→ 注意事项

- IP20 ()

- IEC/EN 60664-1 2
- IEC 61000-4

-
-

→ 补充说明

- ○

- $$\begin{aligned}
 &1). \quad C_o \geq C_p \quad L_o \geq L_p \\
 &2). \quad L_i < L_o \times 1\% \quad C_o \geq C_i \\
 &3). \quad C_i < C_o \times 1\% \quad L_o \geq L_i \\
 &\bigcirc 4). \quad L_i \geq L_o \times 1\% \quad C_i \geq C_o \times 1\% \quad C_o \times 50\% \geq 0.6 \mu F \quad L_o \times \\
 &\quad 50\% \geq L_i + L_p \quad / \quad A/ \quad B \quad C_o \times 50\% \leq 1 \mu F \quad C \\
 &\quad C_o \times 50\% \leq 0.6 \mu F
 \end{aligned}$$

A. BUS DIN 35

B.

DIN

BUS

BUS

